



FW2815BW-S2-5

ASSEMBLY INSTRUCTIONS

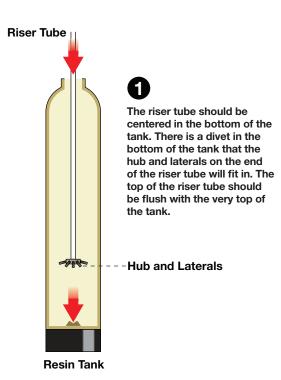

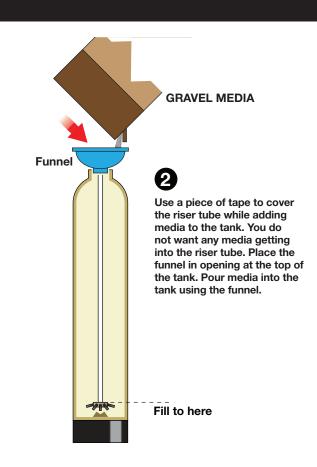

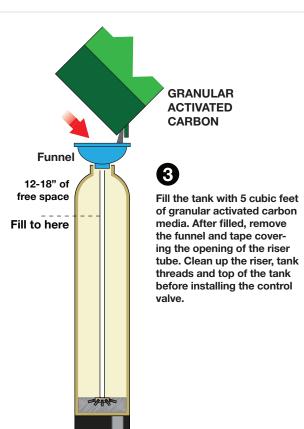

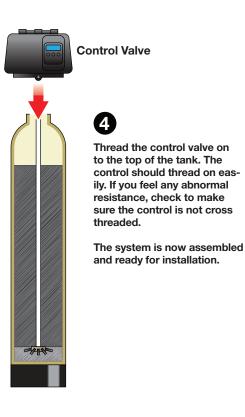

1. Valve Components



2. Plumbing Connection & Startup

- 1. Connect plumbing to the system. Turn on the water to the house and check all connections for leaks.
- 2. Initiate the backwash cycle on the filter valve. This is done by pressing the diamond shaped button on the face of a digital valve.
- 3. Allow system to complete the backwash and regeneration cycles on its own. It will return to service once this is done.

*Note: The system should be ready for use once the backwash cycle is complete. You may have to initiate a second backwash cycle on very large systems if there is a discoloration to the water. It is normal to see very small air bubbles in the water when new systems are installed. These tiny bubbles can give the water a greyish cast. However, they do quickly dissipate in a clear glass. These bubbles will go away once the system becomes thoroughly saturated. This could take several days depending upon water usage.